



# ROHS

料號	尺寸	尺吋
1X2	1.0	2.0
1X3	2.0	3.0
1X4	3.0	4.0
1X5	4.0	5.0
1X6	5.0	6.0
1X7	6.0	7.0
1X8	7.0	8.0
1X9	8.0	9.0
1X10	9.0	10.0
1X11	10.0	11.0
1X12	11.0	12.0
1X13	12.0	13.0
1X14	13.0	14.0
1X15	14.0	15.0
1X16	15.0	16.0
1X17	16.0	17.0
1X18	17.0	18.0
1X19	18.0	19.0
1X20	19.0	20.0
1X21	20.0	21.0
1X22	21.0	22.0
1X23	22.0	23.0
1X24	23.0	24.0
1X25	24.0	25.0
1X26	25.0	26.0
1X27	26.0	27.0
1X28	27.0	28.0
1X29	28.0	29.0
1X30	29.0	30.0
1X31	30.0	31.0
1X32	31.0	32.0
1X33	32.0	33.0
1X34	33.0	34.0
1X35	34.0	35.0
1X36	35.0	36.0
1X37	36.0	37.0
1X38	37.0	38.0
1X39	38.0	39.0
1X40	39.0	40.0
1X41	40.0	41.0
1X42	41.0	42.0
1X43	42.0	43.0
1X44	43.0	44.0
1X45	44.0	45.0
1X46	45.0	46.0
1X47	46.0	47.0
1X48	47.0	48.0
1X49	48.0	49.0
1X50	49.0	50.0


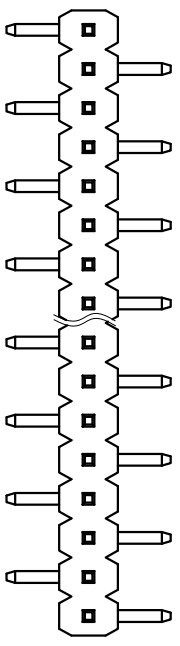


TYPE 1

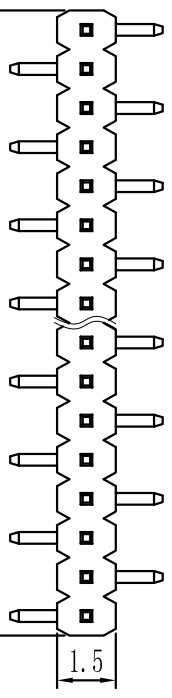

TYPE 2

Height
H=1.0mm
H=1.5mm

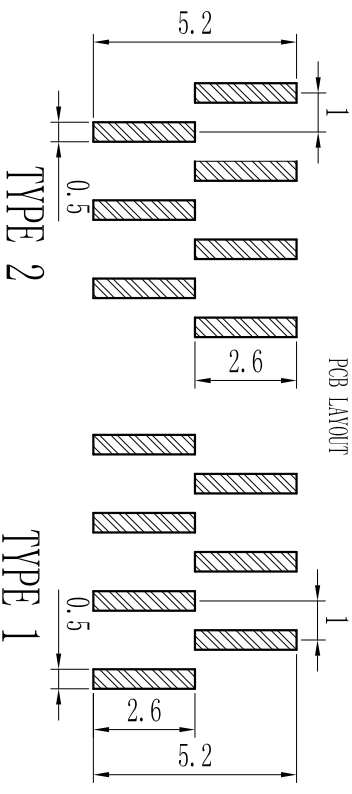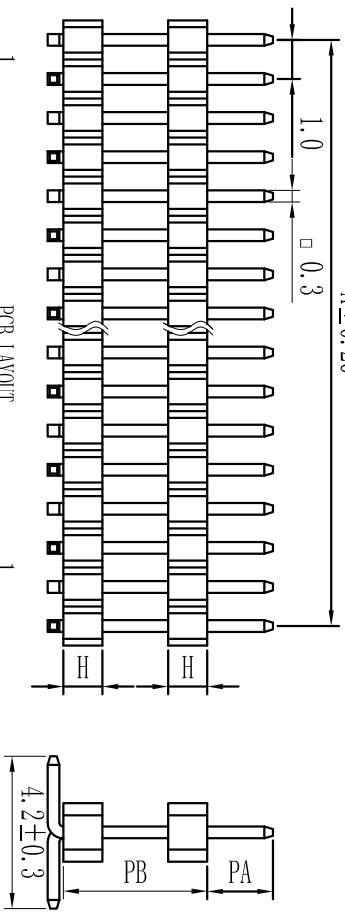

For reference only

Specification:  
 Current Rating : 0.75AMP  
 Temperature Range : -40°C to +105°C  
 Contact Resistance : 30mΩ Max  
 Insulation Resistance : 1000MΩ Min  
 Withstanding Voltage : AC 500V  
 Material:  
 Insulator : Polyester (UL94V-0)  
 Standard: PA6T/LCP  
 Contact: Brass  
 Plating : Au or Sn Over 50u" Ni

REV.		REVISION RECORD		DATE		SIZE: A4		UNIT: MM		SCALE: 1:1		NAME		DATE		PART. NO:			
1		2		3		4		5		6		7		8		LSPH-0008			
GENERAL TOLERANCES										L INEAR		ANGLES		APPROVED		DESIGNER		DRAWN	
0.0 ± 0.25										X° REF ± 6°		0.00 ± 0.15		X° ± 3°		0.000 ± 0.08		X° X' ± 2°	
DRAWN										DESIGNER		DATE		TITLE:		Pitch: 1.0mm Pin Header, Dual Plastic, Single Row, SMT Type			
SHENZHEN UNICABLE CONNECTOR CO., LTD.										SHENZHEN UNICABLE CONNECTOR CO., LTD.		SHENZHEN UNICABLE CONNECTOR CO., LTD.		SHENZHEN UNICABLE CONNECTOR CO., LTD.		SHENZHEN UNICABLE CONNECTOR CO., LTD.			
SZ. STC. CN										SZ. STC. CN		SZ. STC. CN		SZ. STC. CN		SZ. STC. CN			
0755-23765753										0755-23765753		0755-23765753		0755-23765753		0755-23765753			
ENDE0008										ENDE0008		ENDE0008		ENDE0008		ENDE0008			
1/1										1/1		1/1		1/1		1/1			