
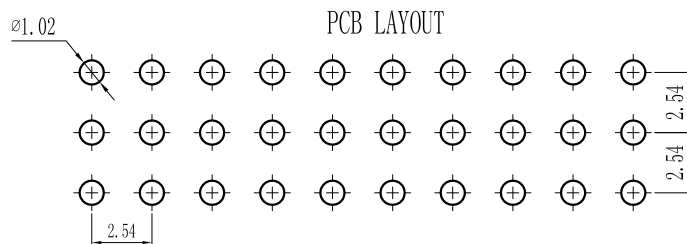
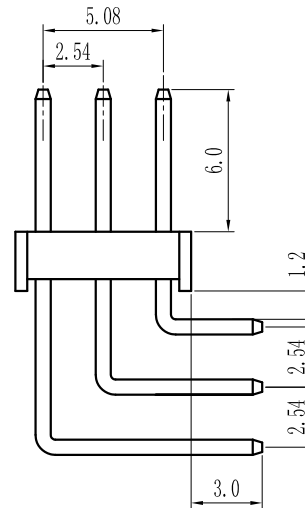
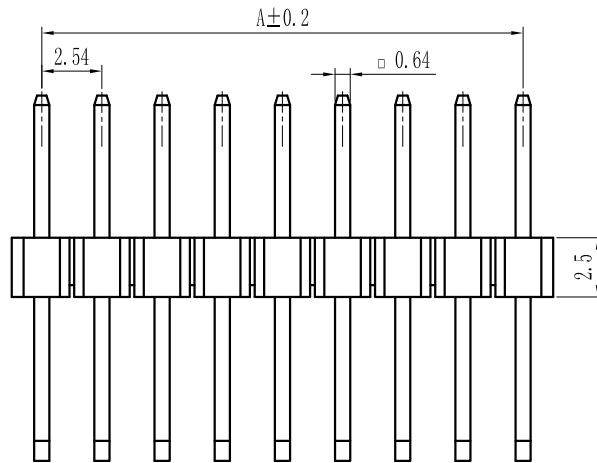


ROHS

For reference only

Pin数	尺寸A	尺寸B
3×1	-	2.54
3×2	2.54	5.08
3×3	5.08	7.62
3×4	7.62	10.16
3×5	10.16	12.70
3×6	12.70	15.24
3×7	15.24	17.78
3×8	17.78	20.32
3×9	20.32	22.86
3×10	22.86	25.40
3×11	25.40	27.94
3×12	27.94	30.48
3×13	30.48	33.02
3×14	33.02	35.56
3×15	35.56	38.10
3×16	38.10	40.64
3×17	40.64	43.18
3×18	43.18	45.72
3×19	45.72	48.26
3×20	48.26	50.80
3×21	50.80	53.34
3×22	53.34	55.88
3×23	55.88	58.42
3×24	58.42	60.96
3×25	60.96	63.50
3×26	63.50	66.04
3×27	66.04	68.58
3×28	68.58	71.12
3×29	71.12	73.66
3×30	73.66	76.20
3×31	76.20	78.74
3×32	78.74	81.28
3×33	81.28	83.82
3×34	83.82	86.36
3×35	86.36	88.90
3×36	88.90	91.44
3×37	91.44	93.98
3×38	93.98	96.52
3×39	96.52	99.06
3×40	99.06	101.60

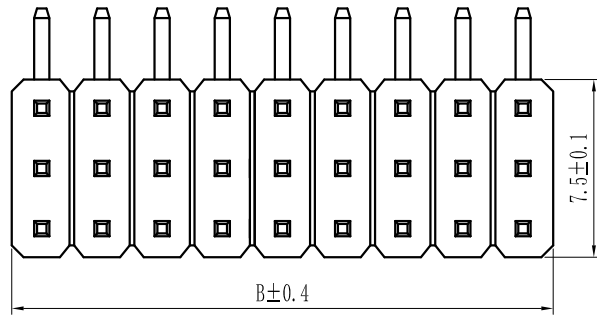

Specification:

Current Rating : 3.0AMP

Temperature Range : -40°Cto+105°C

Contact Resistance : 20mΩ Max

Insulation Resistance : 1000MΩ Min

Withstanding Voltage : AC 1000V

Material:

Insulator : Polyester (UL94V-0)

Standard:PBT/PA6T/LCP

Contact: Brass

Plating : Au or Sn Over 50u" Ni



GENERAL TOLERANCES

LINEAR

ANGLES

0.00±0.15

X° REF±6°

0.00±0.08

X° X'±2°

SCALE:
1:1

NAME

DATE

APPROVED

DRAWN



深圳市联素连接器有限公司
SHENZHEN UNICABLE CONNECTOR CO., LTD.
公司网址WWW.SZLSTC.CN
公司邮箱SZLSTC@126.COM

公司电话0755-23765650
公司传真0755-23765753

PART. NO:

LSPH-0113

DWG. NO:

ENDE0113

REV: AO

SHEET: 1/1

REVISION RECORD

DATE

SIZE: A4

0.000±0.08

X° X'±2°

TITLE:
Pitch2.54mm Pin Header, Single Plastic,
Triple Row, Right Angle Type