



ROHS

For reference only



Pin数	尺寸A	尺寸B
1X1	-	3.96
1X2	3.96	7.92
1X3	7.92	11.88
1X4	11.88	15.84
1X5	15.84	19.80
1X6	19.80	23.76
1X7	23.76	27.72
1X8	27.72	31.68
1X9	31.68	35.64
1X10	35.64	39.60
1X11	39.60	43.56
1X12	43.56	47.52
1X13	47.52	51.48
1X14	51.48	55.44
1X15	55.44	59.40
1X16	59.40	63.36
1X17	63.36	67.32
1X18	67.32	71.28
1X19	71.28	75.24
1X20	75.24	79.20

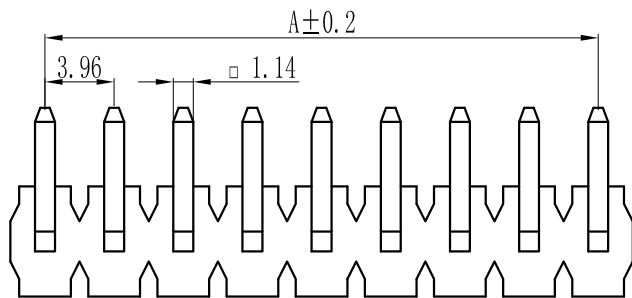

塑胶为黑色

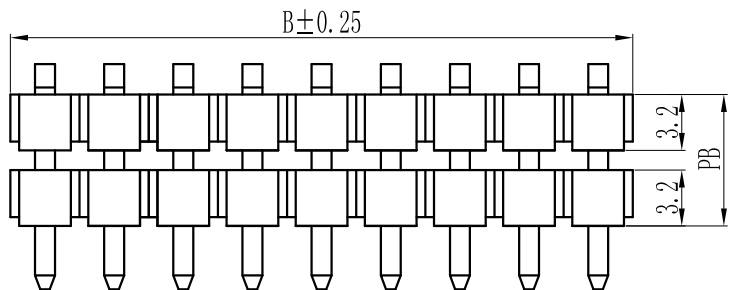

PCB LAYOUT



Specification:

Current Rating : 7AMP

Temperature Range : -40℃to+105℃

Contact Resistance : 20mΩ Max

Insulation Resistance : 1000MΩ Min

Withstanding Voltage : AC 500V

Material:

Insulator : Polyester (UL94V-0)

Standard:PA6T/LCP

Contact: Brass

Plating : Au or Sn Over 50u" Ni



GENERAL TOLERANCES

LINER ANGLES

0.0±0.25 X° REF±6°

0.00±0.15 X° ±3°

0.000±0.08 X° X'±2°

SCALE:  
1:1

NAME

DATE

APPROVED

DESIGNER

DRAWN



深圳市联索连接器有限公司  
SHENZHEN UNICABLE CONNECTOR CO., LTD.  
公司网址WWW.SZLSTC.CN 公司电话0755-23765650  
公司邮箱SZLSTC@126.COM 公司传真0755-23765753

TITLE: 3.96mm单排针, 180°, 双塑, 塑高3.2mm  
Spec:3.96mm Board Spacer, Single Row, Right Angle  
Positions: 1X1~1X20 Plastic Height: 3.2mm

PART. NO:

LSPH-0116

DWG. NO:

ENDE0116

REV: AO

SHEET: 1/1

REVISION RECORD

DATE

UNIT: MM

SIZE: A4

1

2

3

4

5

6

7

8