

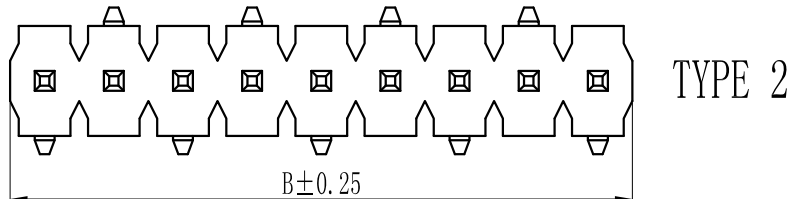


ROHS


For reference only

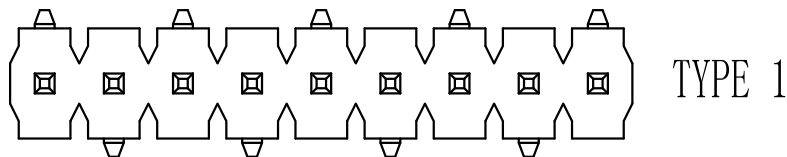

Pin数	尺寸A	尺寸B
1X1	-	3.96
1X2	3.96	7.92
1X3	7.92	11.88
1X4	11.88	15.84
1X5	15.84	19.80
1X6	19.80	23.76
1X7	23.76	27.72
1X8	27.72	31.68
1X9	31.68	35.64
1X10	35.64	39.60
1X11	39.60	43.56
1X12	43.56	47.52
1X13	47.52	51.48
1X14	51.48	55.44
1X15	55.44	59.40
1X16	59.40	63.36
1X17	63.36	67.32
1X18	67.32	71.28
1X19	71.28	75.24
1X20	75.24	79.20

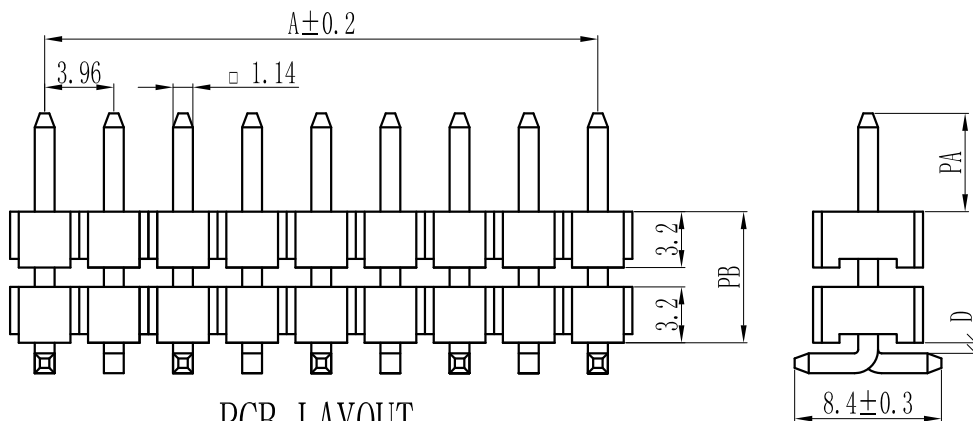

Specification:
 Current Rating : 7AMP
 Temperature Range : -40°Cto+105°C
 Contact Resistance : 20mΩ Max
 Insulation Resistance : 1000MΩ Min
 Withstanding Voltage : AC 500V
 Material:
 Insulator : Polyester (UL94V-0)
 Standard:PA6T/LCP
 Contact: Brass
 Plating : Au or Sn Over 50u" Ni

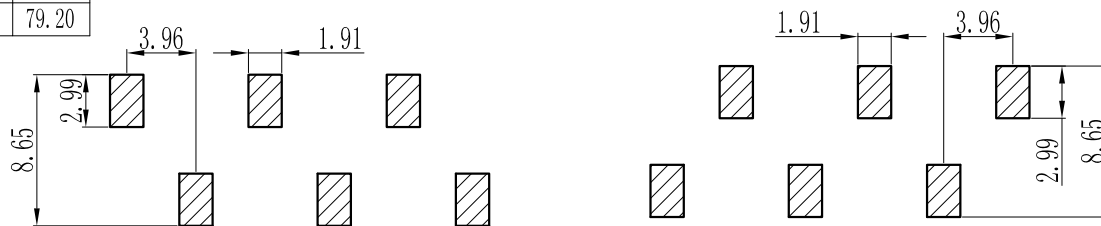

H				GENERAL TOLERANCES		SCALE:	NAME	DATE	深圳市联索连接器有限公司 SHENZHEN UNICABLE CONNECTOR CO., LTD. 公司网址WWW.SZLSTC.CN 公司邮箱SZLSTC@126.COM 公司电话0755-23765650 公司传真0755-23765753	PART. NO:	
				LINEAR	ANGLES	1:1				LSPH-0115	
				0.0±0.25	X° REF±6°	APPROVED				DWG. NO:	
				0.00±0.15	X° ±3°	DESIGNER				ENDE0115	
REV.		REVISION RECORD	DATE	UNIT: MM	0.000±0.08	X° X'±2°	DRAWN	TITLE: 3.96mm单排针, 180°, 双塑, 塑高3.2mm Spec:3.96mm Board Spacer, Single Row, Straight Positions: 1X1'X20 Plastic Height: 3.2mm		REV: AO	SHEET: 1/1