



ROHS

For reference only

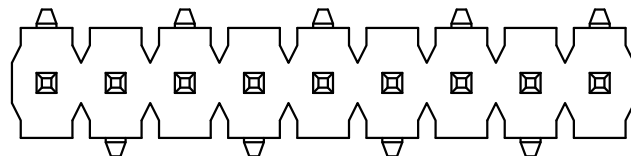



TYPE 1

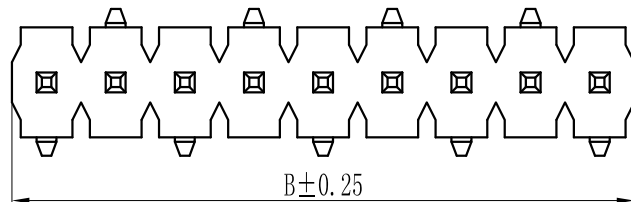

TYPE 2

$B \pm 0.25$


$A \pm 0.2$

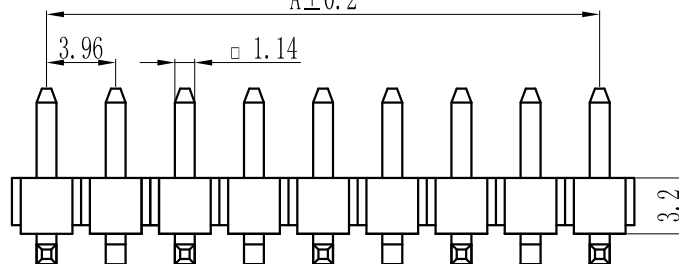

Specification:
 Current Rating : 7AMP
 Temperature Range : -40°C to +105°C
 Contact Resistance : 20mΩ Max
 Insulation Resistance : 1000MΩ Min
 Withstanding Voltage : AC 500V
 Material:
 Insulator : Polyester (UL94V-0)
 Standard: PA6T/LCP
 Contact: Brass
 Plating : Au or Sn Over 50u" Ni

Pin数	尺寸A	尺寸B
1X1	-	3.96
1X2	3.96	7.92
1X3	7.92	11.88
1X4	11.88	15.84
1X5	15.84	19.80
1X6	19.80	23.76
1X7	23.76	27.72
1X8	27.72	31.68
1X9	31.68	35.64
1X10	35.64	39.60
1X11	39.60	43.56
1X12	43.56	47.52
1X13	47.52	51.48
1X14	51.48	55.44
1X15	55.44	59.40
1X16	59.40	63.36
1X17	63.36	67.32
1X18	67.32	71.28
1X19	71.28	75.24
1X20	75.24	79.20

PCB LAYOUT

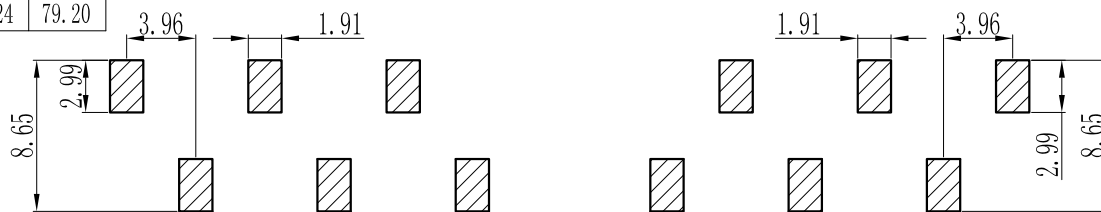

TYPE 1

TYPE 2



GENERAL TOLERANCES

SCALE:
1:1

NAME

DATE

LINEAR

ANGLES

APPROVED

DESIGNER

DESIGNER

DRAWN

DRAWN



深圳市联索连接器有限公司
 SHENZHEN UNICABLE CONNECTOR CO., LTD.
 公司网址 WWW.SZLSTC.CN
 公司邮箱 SZLSTC@126.COM
 公司电话 0755-23765650
 公司传真 0755-23765753

PART. NO:

LSPH-0114

DWG. NO:

ENDE0114

REV: AO

SHEET: 1/1

REV.	REVISION RECORD	DATE	UNIT: MM	SIZE: A4
			0.00 ± 0.15	X° ± 3°
			0.000 ± 0.08	X° X' ± 2°

TITLE:
 3.96mm单排针, SMT, 双塑, 塑高3.2mm
 Spec: 3.96mm Pin Header, Single Row, SMT
 Positions: 1X1~1X20 Plastic Height: 3.2mm