


ROHS

For reference only

Pin数	尺寸A	尺寸B
2x2	0.80	1.60
2x3	1.60	2.40
2x4	2.40	3.20
2x5	3.20	4.00
2x6	4.00	4.80
2x7	4.80	5.60
2x8	5.60	6.40
2x9	6.40	7.20
2x10	7.20	8.00
2x11	8.00	8.80
2x12	8.80	9.60
2x13	9.60	10.40
2x14	10.40	11.20
2x15	11.20	12.00
2x16	12.00	12.80
2x17	12.80	13.60
2x18	13.60	14.40
2x19	14.40	15.20
2x20	15.20	16.00
2x21	16.00	16.80
2x22	16.80	17.60
2x23	17.60	18.40
2x24	18.40	19.20
2x25	19.20	20.00
2x26	20.00	20.80
2x27	20.80	21.60
2x28	21.60	22.40
2x29	22.40	23.20
2x30	23.20	24.00
2x31	24.00	24.80
2x32	24.80	25.60
2x33	25.60	26.40
2x34	26.40	27.20
2x35	27.20	28.00
2x36	28.00	28.80
2x37	28.80	29.60
2x38	29.60	30.40
2x39	30.40	31.20
2x40	31.20	32.00
2x41	32.00	32.80
2x42	32.80	33.60
2x43	33.60	34.40
2x44	34.40	35.20
2x45	35.20	36.00
2x46	36.00	36.80
2x47	36.80	37.60
2x48	37.60	38.40
2x49	38.40	39.20
2x50	39.20	40.00

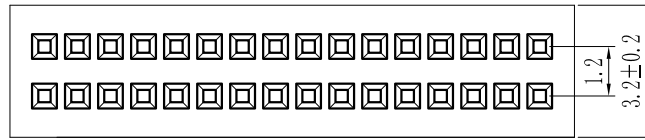

C
1.2
1.4

Specification:

Current Rating : 0.75AMP

Temperature Range : -40°Cto+105°C

Contact Resistance : 30mΩ Max

Insulation Resistance : 1000MΩ Min

Withstanding Voltage : AC 500V



Material:

Insulator : Polyester (UL94V-0)


Standard:PA6T/LCP

Contact: Bronze

Plating : Au or Sn Over 50u" Ni

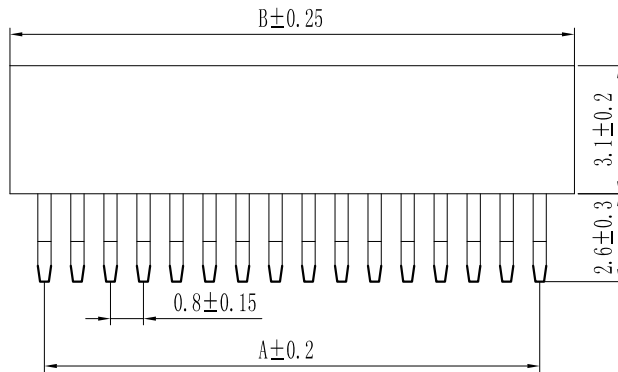

PCB LAYOUT
t=1.6/1.8

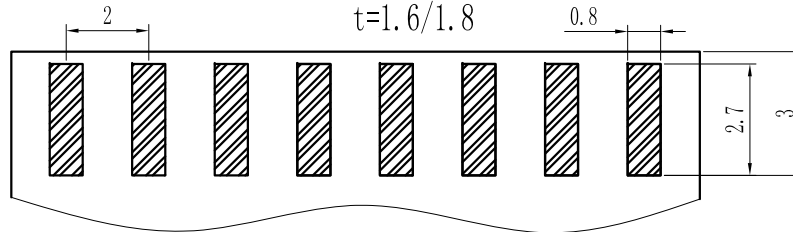

GENERAL TOLERANCES

LINEAR

ANGLES

0.00±0.15

X° X'±2°

SCALE:

1:1

NAME

DATE

APPROVED

DESIGNER

DRAWN

深圳市联索连接器有限公司
SHENZHEN UNICABLE CONNECTOR CO., LTD.

公司网址WWW.SZLSTC.CN
公司邮箱SZLSTC@126.COM

公司电话0755-23765650
公司传真0755-23765753

PART. NO:

LSFH-0002

DWG. NO:

ENDE1002

TITLE:

0.8*1.2mm Female Header, Dual Row,
Plastic Height 3.1mm, Clip Type(U)

REV:

A0

SHEET:

1/1

REVISION RECORD

DATE

SIZE: A4

0.000±0.08

X° X'±2°

DRAWN

1

2

3

4

5

6

7

8