
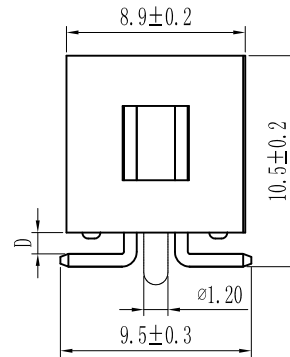
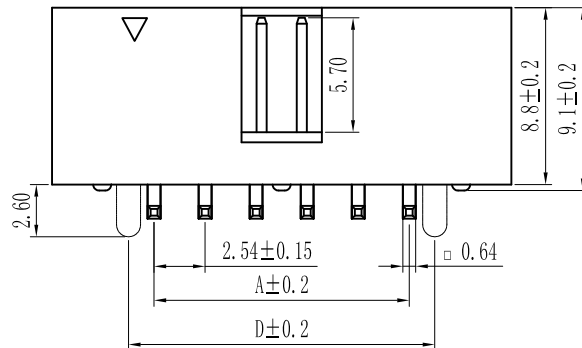



ROHS

For reference only

Pin数	尺寸A	尺寸B	尺寸C	尺寸D
2x3	5.08	12.94	15.24	7.62
2x4	7.62	15.48	17.78	10.16
2x5	10.16	18.02	20.32	12.70
2x6	12.70	20.56	22.86	15.24
2x7	15.24	23.10	25.40	17.78
2x8	17.78	25.64	27.94	20.32
2x9	20.32	28.18	30.48	22.86
2x10	22.86	30.72	33.02	25.40
2x11	25.40	33.26	35.56	27.94
2x12	27.94	35.80	38.10	30.48
2x13	30.48	38.34	40.64	33.02
2x14	33.02	40.88	43.18	35.56
2x15	35.56	43.42	45.72	38.10
2x16	38.10	45.96	48.26	40.64
2x17	40.64	48.50	50.80	43.18
2x18	43.18	51.04	53.34	45.72
2x19	45.72	53.58	55.88	48.26
2x20	48.26	56.12	58.42	50.80
2x21	50.80	58.66	60.96	53.34
2x22	53.34	61.20	63.50	55.88
2x23	55.88	63.74	66.04	58.42
2x24	58.42	66.28	68.58	60.96
2x25	60.96	68.82	71.12	63.50
2x26	63.50	71.36	73.66	66.04
2x27	66.04	73.90	76.20	68.58
2x28	68.58	76.44	78.74	71.12
2x29	71.12	78.98	81.28	73.66
2x30	73.66	81.52	83.82	76.20
2x31	76.20	84.06	86.36	78.74
2x32	78.74	86.60	88.90	81.28

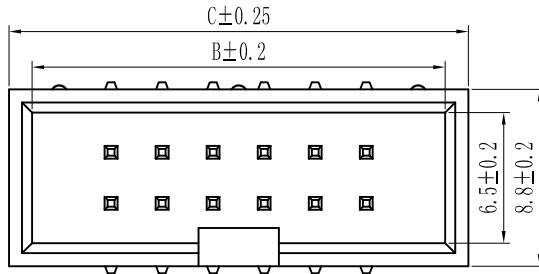

PCB LAYOUT

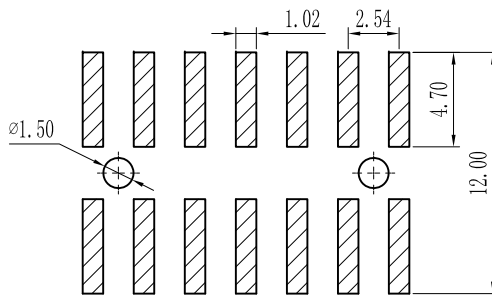

Specification:

Current Rating : 3AMP

Temperature Range : -40°C to +105°C

Contact Resistance : 20mΩ Max

Insulation Resistance : 1000MΩ Min

Withstanding Voltage : AC 1000V

Material:

Insulator : Polyester (UL94V-0)

Standard: PBT/PA6T/LCP

Contact: Brass

Plating : Au or Sn Over 50u" Ni



GENERAL TOLERANCES

LINEAR	ANGLES
0.0±0.25	X° REF±6°
0.00±0.15	X° ±3°
0.000±0.08	X° X'±2°

SCALE: 1:1

NAME

DATE

APPROVED

DESIGNER

DRAWN

深圳市联索连接器有限公司
SHENZHEN UNICABLE CONNECTOR CO., LTD.

公司网址WWW.SZLSTC.CN 公司电话0755-23765650
公司邮箱SZLSTC@126.COM 公司传真0755-23765753

TITLE: 2.54间距筒牛, SMT, 塑高8.8mm
Spec: 2.54mm Box Header, SMT
Positions: 6°64 Plastic Height: 8.8mm

PART. NO:

LSBH-0031

DWG. NO:

ENDE2031

REV: AO

SHEET: 1/1

REVISION RECORD

DATE

UNIT: MM
SIZE: A4