
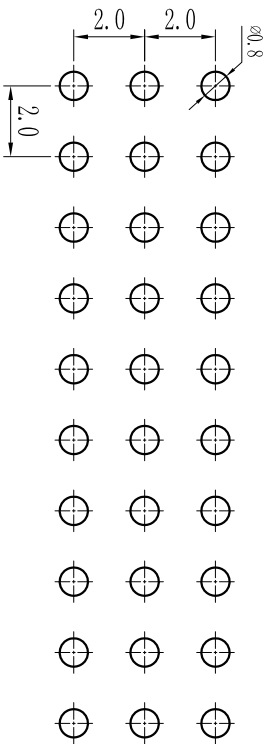
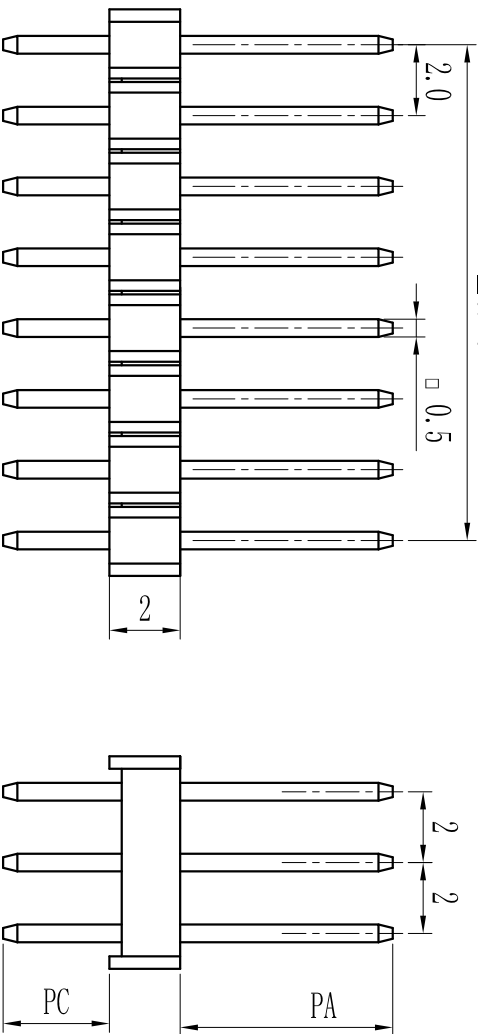


ROHS

For reference only

A	Pin 脚		Pin 号	
	Pin 脚	Pin 号	Pin 脚	Pin 号
A	3x1	-	2.0	
	3x2	2.0	4.0	
	3x3	4.0	6.0	
B	3x4	6.0	8.0	
	3x5	8.0	10.0	
	3x6	10.0	12.0	
C	3x7	12.0	14.0	
	3x8	14.0	16.0	
	3x9	16.0	18.0	
D	3x10	18.0	20.0	
	3x11	20.0	22.0	
	3x12	22.0	24.0	
E	3x13	24.0	26.0	
	3x14	26.0	28.0	
	3x15	28.0	30.0	
F	3x16	30.0	32.0	
	3x17	32.0	34.0	
	3x18	34.0	36.0	
G	3x19	36.0	38.0	
	3x20	38.0	40.0	
	3x21	40.0	42.0	
H	3x22	42.0	44.0	
	3x23	44.0	46.0	
	3x24	46.0	48.0	
I	3x25	48.0	50.0	
	3x26	50.0	52.0	
	3x27	52.0	54.0	
J	3x28	54.0	56.0	
	3x29	56.0	58.0	
	3x30	58.0	60.0	
K	3x31	60.0	62.0	
	3x32	62.0	64.0	
	3x33	64.0	66.0	
L	3x34	66.0	68.0	
	3x35	68.0	70.0	
	3x36	70.0	72.0	
M	3x37	72.0	74.0	
	3x38	74.0	76.0	
	3x39	76.0	78.0	
N	3x40	78.0	80.0	
	3x41	80.0	82.0	
	3x42	82.0	84.0	
O	3x43	84.0	86.0	
	3x44	86.0	88.0	
	3x45	88.0	90.0	
P	3x46	90.0	92.0	
	3x47	92.0	94.0	
	3x48	94.0	96.0	
Q	3x49	96.0	98.0	
	3x50	98.0	100.0	
	3x51	100.0	102.0	
R	3x52	102.0	104.0	

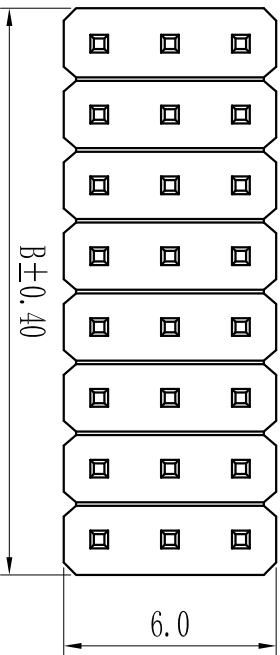

PCB LAYOUT

Height	
H=1.0mm、1.5mm、2.0mm、3.0mm	

Specification:
Current Rating : 1.5AMP
Temperature Range : -40℃to+105℃
Contact Resistance : 20mΩ Max
Insulation Resistance : 1000MΩ Min
Withstanding Voltage : AC 500V
Material:
Insulator : Polyester (UL94V-0)
Standard:PBT/PA6T/LCP
Contact: Brass
Plating : Au or Sn Over 50u" Ni

			GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	深圳市联索连接器有限公司 SHENZHEN UNICABLE CONNECTOR CO., LTD. 公司网址: WWW.SZLSTC.CN 公司电话: 0755-23765650 公司邮箱: SZLSTC@126.COM 公司传真: 0755-23765753	PART. NO:	
			LINEAR	ANGLES	APPROVED				LSPH-0066	
			0.0 ± 0.25	X° REF ± 6°					DWG. NO:	
					DESIGNER				ENDE0066	
			UNIT: MM	X° ± 3°					REV: A0	
			SIZE: A4	X° X' ± 2°	DRAWN				SHEET: 1/1	
REV.	REVISION RECORD	DATE								